

Anti Slip Timber Decking Solutions

Providing sustainable, reassuring performance

WJ GROUP - Certified timber engineering and treatment specialists.



- Long Lasting
- Low Maintenance
- Certified
- 15 Year Warranty
- Accredited

www.wj-group.co.uk

WJ Group, 1A Main Street,
Kirkburn, Driffield, YO25 9DU
T: 01377 796001
E: info@deckwright.co.uk



DeckWright Anti Slip Decking Service

Providing sustainable, reassuring performance

DeckWright Anti Slip is a flexible mix of modified 2 part polyurethane resin impregnated with bauxite aggregate. Commodity code: 3921131090.

The DeckWright Anti Slip process can be applied to most species and specifications of timber. The DeckWright Anti Slip Decking Service allows customers to source their own timber decking products so we can then apply our specially formulated anti slip decking solution in a factory controlled process.



The process transforms timber deck boards into fully tested and safe non slip surfaces. The specially formulated combination of resin and aggregate has been designed to work on all specifications of timber decking and is a robust solution to the hazards posed in slippery conditions.

DeckWright Anti Slip can be applied to a range of groove sizes and can withstand the heaviest of commercial use. Unlike most competitor products, which utilise a very hard brittle epoxy based resin, DeckWright Anti Slip uses resin technologies derived from the latest resins used on anti slip highway surfaces. This provides two major advantages: Firstly, in service the resin is able to bend and flex with the timber as it moves in use, and expands and contracts with changing moisture content through the seasons. Additionally, road traffic grade resin is highly durable, compatible with extreme temperatures and, as a result, retains good anti slip properties. It remains strongly bonded to the timber for the life of the decking. Secondly, and of crucial importance to installers, it is generally possible to cut the decking on site using normal hand tools, rather than specialist tungsten carbide rotary saws. This significantly increases ease and speed of installation while providing major Health & Safety benefits through reduction in noise, dust and sparks.

www.wj-group.co.uk

Testing & Accreditation

WJ Timber Treatments' DeckWright Anti Slip product has been independently tested and approved by the Health & Safety Laboratory in Buxton, in accordance with British Standard BS 7976: 2002.

Additionally, the timber can be preservative treated in accordance with BS 8417:2011. This can be applied to both Use Class 3 (for above ground applications) and Use Class 4 (for ground contact applications), giving a warranty of 5 or 10 years to pine timber decking (please check for applicable warranty on other species).

DeckWright Anti Slip is a DeckMark and DeckMark + accredited product through the TDCA (Timber Decking and Cladding Association).

DeckWright is available with PEFC and FSC® certification. Ask for our FSC® products.

FSC® chain of custody number: NC COC 026801 EA
PEFC certification number: CATG PEFC COC 633



Pendulum Test Value (PTV)

The high slip-resistance performance of DeckWright Anti-Slip was awarded a PTV score of 71 - any PTV score greater than 36 is considered to be of 'low slip potential'.

The PTV test is designed to replicate a pedestrian heel strike - the point at which most slips occur. When a pedestrian heel strikes a wet floor a fluid film is created between them which subsequently causes someone to slip.

Package, Delivery & Storage

All boards are packaged on purpose built pallets. We also offer delivery option for orders available on request.

Please add 100 x 100mm bearers at 1200mm intervals to avoid boards bowing.




www.wj-group.co.uk

Customisation

We offer a selection of colours and the option to change the number of strips, the grit and the species of timber, to suit both specific requirements and budget. This is for direct purchases.

A significant advantage of using WJ Timber Treatments for the application of our non-slip formula is that deck boards can be impregnated with preservative and fire retardant timber treatments after the application of the anti-slip process. This allows our customers to minimise transportation costs when additional treatments are required.

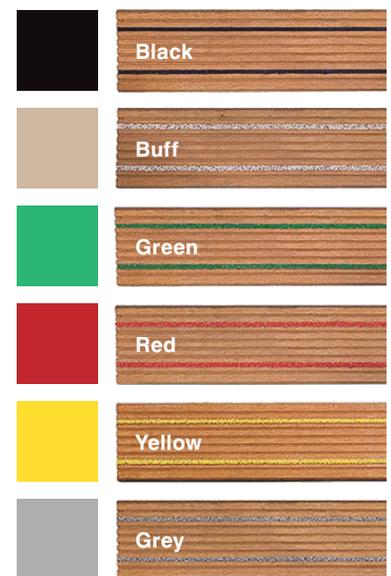

Lengths

Standard Lengths:

- 3.6m
- 4.8m

Other lengths are available on request.

Customisation Options:

- Choice of widths and grip patterns
- Soft or hardwood
- Choice of coloured aggregates
- Grooved or smooth profiles
- Choice of thickness

www.wj-group.co.uk